

SPECIAL ELBOWS


FOR INDUSTRIAL APPLICATIONS

For example, silo installations, compounding, extruder and conveyor systems generally

Wall thickness 1,5 - 4,5 mm (Sched 10S), bending radii from 2.5 x pipe diameter.

Materials: stainless steel, aluminum

pipe diameter in mm	
104,0	
108,0	
114,3	4"
129,0	
139,7	
141,3	5"
154,0	
156,0	
168,3	6"
193,7	
204,0	
219,1	8"
254,0	
273,0	10"
306,0	
323,9	12"
355,6	14"
406,4	16"

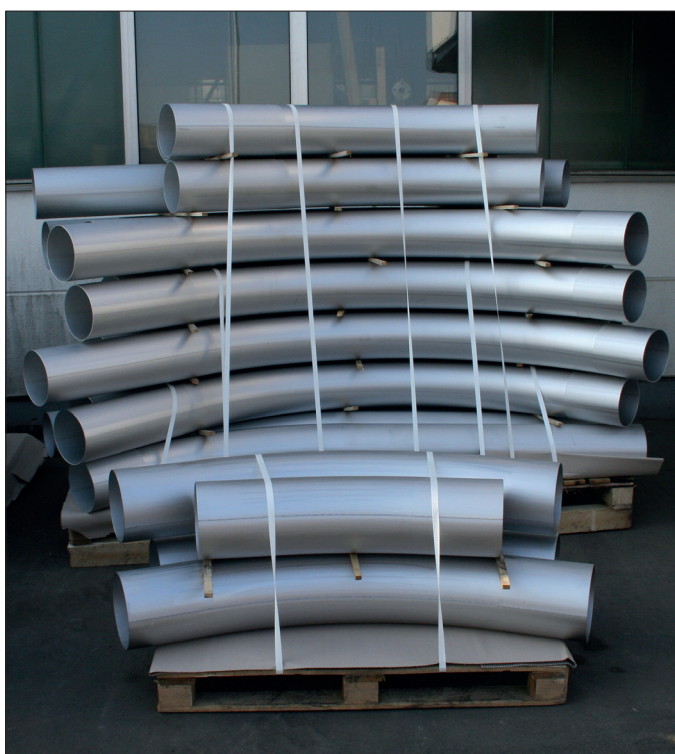

Finish:

with / without straight legs

Special bends:

- consecutive bends as
isometry

Finish: clean bent cold, tolerances acc. factory standard TT-WN 010

Surface condition:

Elbows and bends are supplied by default without surface dressing (e.g. pickling, passivating, radiation)